



Rear View

Front View

Measure body temperature ,
Voice Broadcast ,
temperature display

Test distance: 15-10cm
Temperature accuracy:
Imported IR sensor ±
0.5-0.3 °C
Temperature response
time 100 ms
Working environment
temperature:
5 °C ~ °40c

Modularization
design,easy for
maintenance and
replacement.

Easy assembly: designed
with only 2 pieces
cables and 8 screws,
simple-to-follow
instruction

Program Self-diagnostic
when power on,
no need initial or
periodic calibration.

Harmless to human
body: is harmless
with heart pacemaker,
pregnant women,
magnetic floppy,
recording tapes, etc.

Sound & LED alarm:
Both Side LED indicator
6 zones, Sensitivity
adjustable:
255-0 sensitivity

Alarm strength indicator
on control panel
Password protection,
only the authorized
person can operate.

Gross weight: 45KG

Power Supply: AC100v - 260v

Working temperature: 20°C --+ 50°C

Working Frequency :4KHZ-8KHZ

Standard External size: 2230mm(H)X860mm(W)X480mm(D)

Standard Internal size: 1990mm(H)X700mm(W)X400mm(D)

Package size for door panels: 2290*560*190mm *1ctn

Package size for control unit: 760*350*260 mm*1ctn

PARAMETERS



USAGE CONDITION

Pinpoint Zone Detection

Exclusive multiple target pinpointing with 6 zones standard shows precise target location on the left, center and right side of the body from head to toe.

Program

When the program is self-diagnostic, it does not require initial or periodic calibration, modularization design, easy for maintenance and replacement.

Installation


Only 2 cables and 8 screws.
operation instructions are simple.
High density refractories are used
to make the product stronger.

PRODUCT PACKAGING



Carton Dimension L*W*H (mm)
Door Panel: 190*560*2290 mm
Control Unit :260*350*760 mm
Gross weight :45KG

We will arrange the most suitable logistics according to the actual situation and the customer's requirements.
Our packing is very tight to prevent any breakage during shipment.

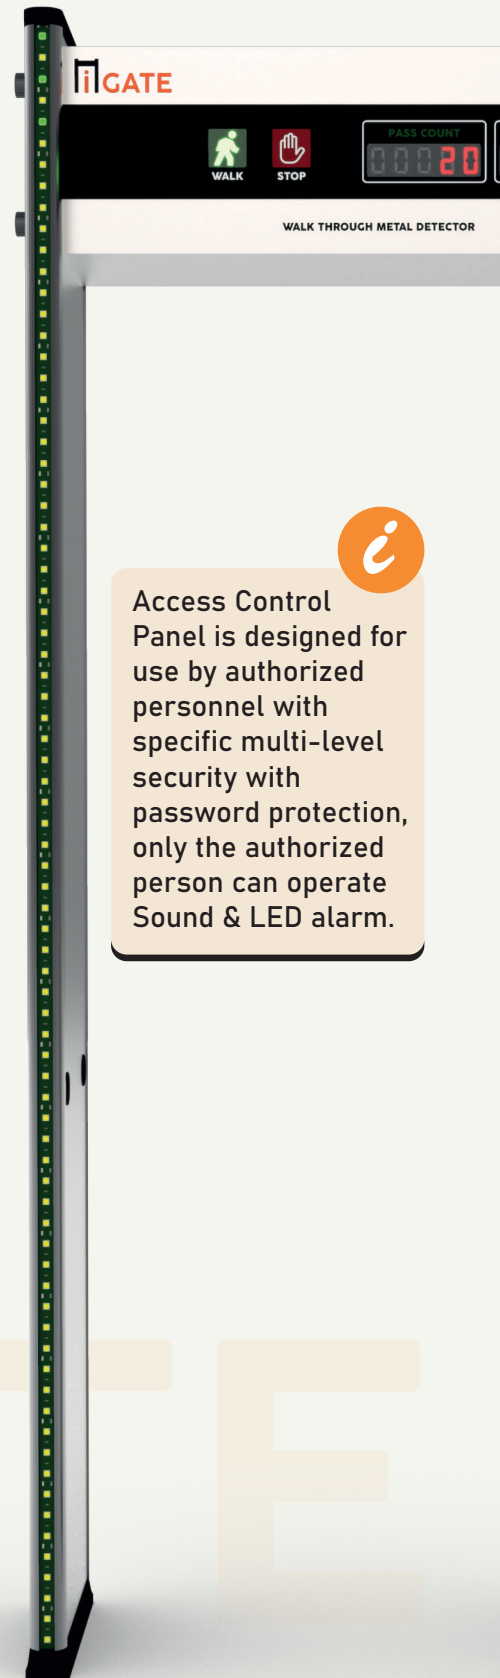

Access Control Panel is designed for use by authorized personnel with specific multi-level security with password protection, only the authorized person can operate Sound & LED alarm.